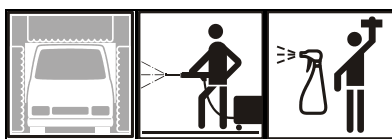


TECHNICAL DATA SHEET**ROLLWAX**

SYMBOL	pH
A-28	5

Quick-drying and easy to use wax in liquid for protection and polishing car body. Creates a shiny protective layer - protects the surface from external conditions and the deposition of dirt road. Dries without additional airflow.

APPLICATION :

- Automatic car wash; hand car wash.

COMPOSITION :

<5% cationic surfactant, <25% organic solvents, excipients

USAGE:

Before use , ready the Safety material data sheet .

Use diluted. Adjust machine setting to get the dilution rate 1:500 (20ml/10l of water). The average application rate is 15-25 ml of solution per a car.

THREAD :

Danger

H226 – Flammable liquid and vapour

H315 – Causes skin irritation

H318 – Causes serious eye damage

H411 – Toxic to aquatic life with long lasting effects

P210 – Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

P280 – Wear protective gloves/eye protection.

P305+P351+P338 – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P310 – Immediately call a POISON CENTER/doctor.

TENZI Sp. z o.o., 72-002 Dołuje, Skarbimierzyce 20

tel. (091) 311 97 77, fax: (091)311 97 79

e-mail: info@tenzi.pl, www.tenzi.pl

TECHNICAL DATA SHEET**DATE OF EXPIRY:**

36 month after production date. The date of production/series and expiry date are on packaging.

FURTHER INFORMATION:

Further information are available in Material Safety Data Sheet.

Contaminated packaging should be emptied. Empty container rinse with water several times, which use it as preparation. Empty packaging can be stored in containers for plastic packaging or transfer to special company to utilization. Observe the provisions of the Act of 13 June 2013. On packaging and packaging waste (Dz. U. 2013, pos. 888